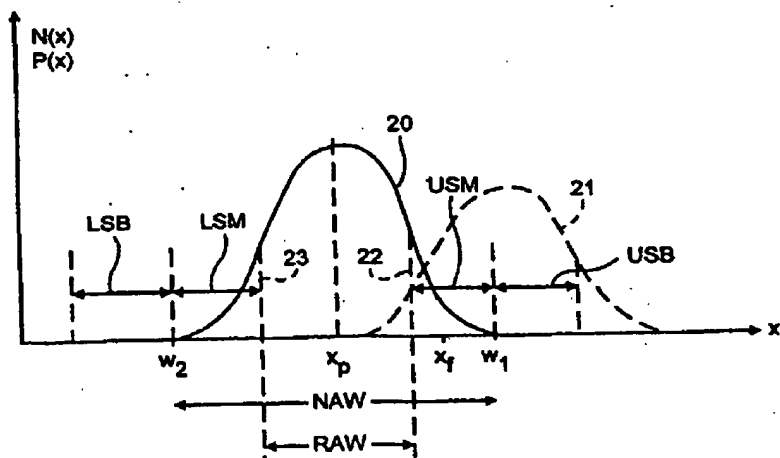


PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7: G07D 5/08, 7/00	A1	(11) International Publication Number: WO 00/48138
		(43) International Publication Date: 17 August 2000 (17.08.00)
<p>(21) International Application Number: PCT/GB00/00339</p> <p>(22) International Filing Date: 4 February 2000 (04.02.00)</p> <p>(30) Priority Data: 9903024.9 10 February 1999 (10.02.99) GB</p> <p>(71) Applicant (for all designated States except US): COIN CONTROLS LTD. [GB/GB]; New Coin Street, Royton, Oldham, Lancashire OL2 6JZ (GB).</p> <p>(72) Inventor; and (73) Inventor/Applicant (for US only): BELL, Malcolm, Reginald, Hallas [GB/GB]; 9 Foxhill Green, Weetwood, Leeds LS16 5PQ (GB).</p> <p>(74) Agents: READ, Matthew, Charles et al.; Venner, Shipley & Co., 20 Little Britain, London EC1A 7DH (GB).</p>		<p>(81) Designated States: AU, CA, CN, JP, KR, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published <i>With international search report.</i></p>

(54) Title: **MONEY ITEM ACCEPTOR**

(57) Abstract

An acceptor for money items such as coins or banknotes produces a money item parameter signal x_1 as a function of a sensed characteristic of a money item. A store (12) provides data which defines a window corresponding to a normal acceptance range of values of the parameter signal for a money item of a particular denomination (NAW), the range including relatively high and low acceptance probability regions (RAW, USM) which correspond to a relatively high or low probability or an occurrence of a sensed money item of a particular denomination. The processor (11) determines when an occurrence of the parameter signal x_1 falls within the low probability region (USM) and then for the next sensed money item compares the value of the parameter signal (x_1) with window data corresponding to a restricted acceptance range (RAW) so as only to accept the second money item if the corresponding value of the parameter signal x_1 falls within the restricted acceptance range.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

WO 00/48138

PCT/GB00/00339

- 1 -

Money Item Acceptor

Field of the invention.

This invention relates to an acceptor for money items such as coins and banknotes and has particular but not exclusive application to a multi-denomination acceptor.

Background

Coin and banknote acceptors are well known. One example of a coin acceptor is described in our GB-A-2 169 429. The acceptor includes a coin rundown path along which coins pass through a coin sensing station at which sensor coils perform a series of inductive tests on the coins in order to develop coin parameter signals which are indicative of the material and metallic content of the coin under test. The coin parameter signals are digitised and compared with stored coin data by means of a microcontroller to determine the acceptability or otherwise of the test coin. If the coin is found to be acceptable, the microcontroller operates an accept gate so that the coin is directed to an accept path. Otherwise, the accept gate remains inoperative and the coin is directed to a reject path.

In banknote validators, sensors detect characteristics of the banknote. For example, optical detectors can be used to detect the geometrical size of the banknote, its spectral response to a light source in transmission or reflection, or the presence of magnetic printing ink can be detected with an appropriate sensor. The parameter signals thus developed are digitised and compared with stored values in a similar way to the previously described prior art coin acceptor. The acceptability of the banknote is determined on the basis of the results of the comparison.

When a number of coins or banknotes of the same denomination are passed through an acceptor, successive values of coin parameter data are thus developed. When the distribution of the values of these signals are plotted as a graph, the result is a bell curve, with a central peak and tails on opposite sides. The shape of the graph may typically although not necessarily be Gaussian.

WO 00/48138

PCT/GB00/00339

- 2 -

The distribution illustrates that for a money item, such as a coin or banknote of a particular denomination, the most probable value of the corresponding parameter signal lies at the peak of the bell curve, with a decreasing probability to either side. In prior coin and banknote validators, data is stored in a memory, corresponding to acceptable ranges of parameter signal for a particular denomination. The acceptor thus compares the value for a coin or banknote under test with the stored data to determine authenticity. The data may define windows in terms of upper and lower limit values, or as a mean value and a standard deviation, such that the window comprises a predetermined number of standard deviations about the mean. By making the stored windows narrow, an increased discrimination is provided between true money items and frauds. However, if the windows are made too narrow, the rejection rate of true money items increases, disadvantageously. The width of the windows is thus selected as a compromise between these two factors. Attempts to defraud coin or banknote validators typically involve the manufacture of facsimile coins or banknotes which cause the acceptor to produce parameter signals which lie within the stored acceptance windows.

In US-A-5 355 989, a coin acceptor is described which switches from using a first normal acceptance window for a true coin, to a second narrower window when a coin parameter signal produced by testing a coin, falls in a region of the normal window for the true coin, corresponding to a low acceptance probability region for the coin concerned. A group of fraudulent coins may all have similar characteristics and they may cause the validator to produce parameter signals which lie within the normal window, but the parameter signals consistently have a value which is not centred on the high probability peak region of the window associated with the true coin but instead are centred on the lower probability tail regions of the bell curve distribution within the normal window. When the parameter signal falls within this low probability region, the second narrower window is then used for the next tested coin. If the next coin has a parameter falling in the narrower window it is a true coin but if not, it is a fraud which should be rejected. This approach seeks to prevent frauds carried out by the use of coins of a particular low value denomination, from a foreign currency set, with characteristics that correspond but are not exactly the same as a high value coin of the currency set that the acceptor is

WO 00/48138

- 3 -

PCT/GB00/00339

designed to accept. It will be understood that the foreign denomination coins exhibit their own generally Gaussian distribution of parameter signals, and if the low probability or tail region of this distribution partially overlaps a corresponding region of the distribution for the true coin that the acceptor is designed to accept, then the low value foreign coins will sometimes be accepted as true coins. However, significant problems remain. In the arrangement disclosed in US-A-5 355 989, when a true coin is inserted, the system switches back from the second narrower window to the first normal acceptance window. If the next coin inserted is a foreign currency coin, if it has a parameter signal within the normal acceptance window, it will be accepted although the system will then switch to the second narrower window for the next coin under test. If the next coin tested is a true coin, it will be accepted and the system will switch back to the first window. The US Patent considers the possibility of counting groups of n coins before making the switch between the windows. Thus, with the prior system, it is possible to obtain acceptance of a significant number of foreign currency coins by alternating them with true coins either individually or in equal numbered groups of n coins. A further disadvantage is that the system is very slow because the foreign coins do not all produce an acceptance and so when a fraudster is attempting to use foreign coins they may be rejected a number of times as a result of falling outside of the first relatively wide acceptance window. However, the prior validator takes no account of the fraud attempt and will only respond when a fraudulent coin is in fact accepted.

Summary of the invention

The present invention seeks to overcome these problems. In accordance with the invention from a first aspect there is provided a money item acceptor comprising: a signal source to produce a money item parameter signal as a function of a sensed characteristic of a money item, a store to provide data corresponding to a normal acceptance range of values of the parameter signal for a money item of a particular denomination, the range including relatively high and low acceptance probability regions wherein the value of a parameter signal corresponds to a relatively high or low probability of an occurrence of sensed money item of said particular denomination, and a processor to determine when an occurrence of the parameter

WO 00/48138

- 4 -

PCT/GB00/00339

signal corresponding to a first money item adopts a predetermined value relationship, and in response thereto, to compare the value of a subsequent occurrence of the parameter signal corresponding to a second money item with data corresponding to a restricted acceptance range as compared with the normal acceptance range, and to provide an output corresponding to acceptability of the second money item if the second occurrence of the parameter signal falls within a predetermined security barrier range outside of the normal acceptance range.

10

In accordance with the invention, the predetermined security barrier range can be generally aligned with the peak of the distribution for the fraudulent coin so that even if the fraudulent coin produces a parameter signal outside of the normal acceptance range, the existence of the fraud attempt is detected and the acceptor switches to the restricted acceptance range to reduce the risk of fraud.

15

The invention further includes a corresponding method of detecting fraudulent coins.

20 In a second aspect, the invention provides a money item acceptor comprising: a signal source to produce a money item parameter signal as a function of a sensed characteristic of a money item, a store to provide data corresponding to a normal acceptance range of values of the parameter signal for a money item of a particular denomination, the range including relatively high and low acceptance probability regions wherein the value of a parameter signal corresponds to a relatively high or low probability of an occurrence of sensed money item of said particular denomination, and a processor to determine when an occurrence of the parameter signal corresponding to a first money item adopts a predetermined value relationship with the low acceptance probability region, and in response thereto, to compare the value of a subsequent occurrence of the parameter signal corresponding to a second money item with data corresponding to a restricted acceptance range as compared with the normal acceptance range, and to provide an output corresponding to acceptability of the second money item if the second

30

WO 00/48138

- 5 -

PCT/GB00/00339

- occurrence of the parameter signal falls in the restricted acceptance range, said processor being operable to compare a first predetermined number of subsequent occurrences of the parameter signal with the restricted acceptance range, and if all of them correspond to acceptable money items, to revert to the normal acceptance range, wherein when using the normal range, the restricted acceptance range is selected in response to a second pre-selected number of occurrences of the parameter signal, smaller than said first predetermined number, adopting said predetermined value relationship.
- 10 By making the second pre-selected number smaller than the first pre-determined number, the discrimination against fraudulent coins is substantially improved. For example, only a single occurrence of a potentially fraudulent coin can trigger use of the restricted acceptance range and then, a larger number of occurrences of true coins falling within the restricted acceptance range need to occur before switching
- 15 back to the normal acceptance range. Thus, if the fraudster repeatedly attempts to defraud the acceptor with fraudulent coins, each such attempt may trigger the use of the restricted acceptance range which is then used for a number of times so as to block subsequent fraud attempts. The acceptor is however responsive to each new fraud attempt thereby reducing the risk of acceptance of further fraudulent coins.
- 20 The processor may be operable to compare a predetermined number of subsequent occurrences of the parameter of the parameter signal with said restricted acceptance range, and if said predetermined number all correspond to acceptable money items, thereafter, to revert to the normal acceptance range.
- 25 The processor may further operate to compare any subsequent occurrences of the parameter signal with said restricted acceptance range for a predetermined time and then to revert to the normal acceptance range.
- 30 The signal source may be operable to produce a plurality of individual money item parameter signals each as a function of a respective different characteristic of a sensed money item, and the store may be configured to provide window data for

WO 00/48138

- 6 -

PCT/GB00/00339

normal acceptance ranges of values of the parameter signals individually for a money item of a particular denomination.

5 The processor may be operative to compare the first occurrence of each parameter signal individually with a corresponding one of said normal acceptance ranges, and to compare a subsequent occurrence of each of the different parameter signals with a corresponding restricted acceptance range for each parameter signal, in response to any one of the first occurrences of the parameter signals having a predetermined value relationship with the low acceptance probability region of its corresponding
10 normal acceptance range.

Alternatively, the processor may be operative to compare the first occurrence of each parameter signal individually with a corresponding one of said normal acceptance ranges, and to compare a subsequent occurrence of each of the different
15 parameter signals with a corresponding restricted acceptance range for each parameter signal selectively in response to the corresponding one of the first occurrences of the parameter signals having a predetermined value relationship with the low acceptance probability region of its normal acceptance range.

20 The acceptor according to the invention may be configured for use with coins, banknotes or other money items.

Brief description of the drawings

In order that the invention may be more fully understood an embodiment thereof
25 will now be described by way of example with reference to the accompanying drawings in which:

Figure 1 is a schematic block diagram of a coin acceptor in accordance with the invention;

Figure 2 is a schematic block diagram of the circuits of the acceptor shown in
30 Figure 1;

Figure 3 is a distribution curve of coin parameter signals produced by the acceptor of Figure 1;

WO 00/48138

- 7 -

PCT/GB00/00339

Figure 4 is a schematic flow diagram of processing steps carried out by the microcontroller 11; and

Figure 5 is a schematic diagram of a banknote acceptor in accordance with the invention.

5

Detailed description

Overview of coin acceptor

Figure 1 illustrates the general configuration of an acceptor according to the invention for use with coins. The coin acceptor is capable of validating a number of coins of different denominations, including bimetal coins, for example the new euro coin set and the new UK coin set including the new bimetal £2.00 coin. The acceptor includes a body 1 with a coin run-down path 2 along which coins under test pass edgewise from an inlet 3 through a coin sensing station 4 and then fall towards a gate 5. A test is performed on each coin as it passes through the sensing station 4. If the outcome of the test indicates the presence of a true coin, the gate 5 is opened so that the coin can pass to an accept path 6, but otherwise the gate remains closed and the coin is deflected to a reject path 7. The coin path through the acceptor for a coin 8 is shown schematically by dotted line 9.

The coin sensing station 4 includes four coin sensing coil units S1, S2, S3 and S4 shown in dotted outline, which are energised in order to produce an inductive coupling with the coin. Also, a coil unit PS is provided in the accept path 6, downstream of the gate 5, to act as a credit sensor in order to detect whether a coin that was determined to be acceptable, has in fact passed into the accept path 6.

25

The coils are energised at different frequencies by a drive and interface circuit 10 shown schematically in Figure 2. Eddy currents are induced in the coin under test by the coil units. The different inductive couplings between the four coils and the coin characterise the coin substantially uniquely. The drive and interface circuit 10 produces corresponding digital coin parameter data signals x_1, x_2, x_3, x_4 , as a function of the different inductive couplings between the coin and the coil units S1, S2, S3 and S4. A corresponding signal is produced for the coil unit PS. The coils S have a small diameter in relation to the diameter of coins under test in order to

30

WO 00/48138

- 8 -

PCT/GB00/00339

detect the inductive characteristics of individual chordal regions of the coin. Improved discrimination can be achieved by making the area A of the coil unit S which faces the coin, such as the coil S1, smaller than 72 mm^2 , which permits the inductive characteristics of individual regions of the coin's face to be sensed.

5 In order to determine coin authenticity, the coin parameter signals produced by a coin under test are fed to a microcontroller 11 which is coupled to a memory in the form of an EEPROM 12. The microcontroller 11 processes the coin parameter signals x_1, \dots, x_n derived from the coin under test and compares the outcome with
10 corresponding stored values held in the EEPROM 12. The stored values are held in terms of windows having upper and lower value limits. Thus, if the processed data falls within the corresponding windows associated with a true coin of a particular denomination, the coin is indicated to be acceptable, but otherwise is rejected. If acceptable, a signal is provided on line 13 to a drive circuit 14 which operates the
15 gate 5 shown in Figure 1 so as to allow the coin to pass to the accept path 6. Otherwise, the gate 5 is not opened and the coin passes to reject path 7.

The microcontroller 11 compares the processed data with a number of different sets of operating window data appropriate for coins of different denominations so that
20 the coin acceptor can accept or reject more than one coin of a particular currency set. If the coin is accepted, its passage along the accept path 6 is detected by the post acceptance credit sensor coil unit PS, and the unit 10 passes corresponding data to the microcontroller 11, which in turn provides an output on line 15 that indicates the amount of monetary credit attributed to the accepted coin.

25 The sensor coil units S each include one or more inductor coils connected in an individual oscillatory circuit and the coil drive and interface circuit 10 includes a multiplexer to scan outputs from the coil units sequentially, so as to provide data to the microcontroller 11. Each circuit typically oscillates at a frequency in a range of
30 50-150 kHz and the circuit components are selected so that each sensor coil S1-S4 has a different natural resonant frequency in order to avoid cross-coupling between them.

WO 00/48138

- 9 -

PCT/GB00/00339

As the coin passes the sensor coil unit S1, its impedance is altered by the presence of the coin over a period of ~100 milliseconds. As a result, the amplitude of the oscillations through the coil is modified over the period that the coin passes and also the oscillation frequency is altered. The variation in amplitude and frequency
5 resulting from the modulation produced by the coin is used to produce the coin parameter signals x_1, \dots, x_n representative of characteristics of the coin.

Processing Circuitry

Figure 3 illustrates a bell shaped distribution curve 20 of the values of one of the
10 parameters, x_1 , produced when a number of coins of the same denomination are passed through the validator. It can be seen that most of the occurrences of the parameter value x_1 occur at a peak value x_p and a generally bell shaped distribution occurs around this peak value. The distribution can be determined by passing a
15 number e.g. 100 coins of the same denomination through the validator and recording the corresponding values of x_1 . The EEPROM 12 stores data corresponding to a window of acceptable values of the parameter x_1 for each denomination of coin to be accepted by the validator. In Figure 3, one of the windows, referred to herein as a normal acceptance window NAW, is shown,
20 extending between upper and lower window limit values w_1, w_2 . The stored data in EEPROM 12 may comprise the upper and lower window limit values w_1, w_2 themselves or may comprise a mean value and a standard deviation, such that the microcontroller 11 can define the window NAW from the stored data as a
predetermined number of standard deviations about the mean.

25 The graph of Figure 3 can also be considered in a different way. For coins of the true denomination that corresponds to the normal acceptance window (NAW), the most likely value of parameter x_1 is the peak value x_p and the least likely value occurs at the upper and lower window limits w_1, w_2 . Whilst it is possible for an acceptable value x_f to occur close to one of the window limits w_1, w_2 , the probability
30 distribution shown in Figure 3 makes clear that it is unlikely that many such values x_f will occur for the true coin concerned. If several values x_f occur, this is more likely to indicate the presence of a fraudulent distribution as shown in dotted outline, with a peak value centred on or around x_f . This property is used in

WO 00/48138

- 10 -

PCT/GB00/00339

accordance with the invention to discriminate between true coins and a set of frauds that have been manufactured to the same design which produce coin parameter values x_i lying within the normal acceptance window NAW. In accordance with the invention, the occurrence of more than parameter value x_i is considered to be
5 unusual and likely to represent the occurrence of a fraud. In accordance with the invention, a restricted access window RAW shown in Figure 3 is used upon detection of such a situation, as will now be described.

As shown in Figure 3, upper and lower safety margins LSM, USM are defined in
10 regions of relatively low probability of an occurrence of a parameter value corresponding to a true coin. It will be understood from the distribution curve 20 that it is much more likely for an occurrence of parameter signal x_i to occur between the area of relatively high probability between dotted lines 22, 23 than in the lower and upper safety margins LSM, USM, where there is a relatively low
15 probability of occurrence of a true value. In accordance with the invention, when the microcontroller 11 shown in Figure 2 detects the presence of a value x_i in either the LSM or USM, it then changes from the normal acceptance window NAW to a restricted acceptance window RAW based on data stored in EEPROM 12, which is narrower than the normal acceptance window, as shown in Figure 3. In practice,
20 the RAW may correspond to the region of high probability between the dotted lines 22, 23 although different values can be used, which are non-contiguous with the LSM and USM. If the next, subsequent occurrence of the parameter signal x_i produced by the next coin under test, occurs in e.g. the USM, close to the previous value x_i , the next coin will be rejected because it lies outside of the restricted access
25 window RAW and is more likely to indicate the presence of a fraudulent coin forming part of the fraudulent coin distribution 21 than the true coin forming part of the distribution 20.

When a first coin under test exhibits a parameter signal x_i within either the upper or
30 lower safety margin, USM, LSM of the normal acceptance window NAW, the coin is accepted as a true coin (assuming that its other detected parameters are satisfactory) but the acceptor then switches to a restricted access window RAW for subsequent coins. The occurrence of the first coin with parameter value x_i sets a flag which

WO 00/48138

- 11 -

PCT/GB00/00339

may comprise a counter in the microcontroller 11. The acceptor continues to use the restricted access window for a predetermined number of coins set by the counter, and the flag remains set until a number of coins with parameter signals x_i lying within the restricted window RAW occur in succession. The number is
5 dependent upon the distribution of coin data and the probability of a true coin legitimately falling at the limits of the distribution 20. This will vary from coin to coin but typically might be six or eight insertions of coin or could be as few as one or as many as twenty.

10 If another coin produces a value x_i outside of the restricted access window prior to expiry of the count, the flag is reset and the count begins again.

Additionally, an upper security barrier USB and a lower security barrier LSB are disposed above and below the upper and lower window limits w_1, w_2 respectively.

15 If a coin produces a parameter signal x_i lying within either the upper or lower security barrier regions USB, LSB, the previously described process is carried out and the acceptor switches from the normal acceptance window NAW to the restricted access window RAW. This process is carried out in order to reject potentially fraudulent coins that form part of a distribution such as the fraudulent
20 distribution 21. For example, it may be possible to find a coin of a foreign denomination which has a close, similar distribution to the true distribution 20, the foreign coin having a distribution 21. The fraudster may attempt to defraud the validator by feeding a series of the foreign coins of the same denomination through the acceptor. With the described arrangement according to the invention, the first
25 foreign coin would be rejected if its parameter signal fell within USB because it is outside of the normal acceptance range NAW, and would cause the system to switch to the RAW to reject subsequent coins of the fraudulent coin distribution. If the first fraudulent coin's parameter signal fell within USB, it would be accepted and again would cause the system to switch from NAW to RAW for subsequent coins.
30 Since for most of the fraudulent foreign coins, their parameter signal is more likely to be in USB than other parts of the distribution 21, there is a high probability that the first fraudulent coin will be rejected.

WO 00/48138

PCT/GB00/00339

- 12 -

The acceptor may also include a timer which, after the restricted access window RAW has been adopted, returns the acceptor back to the normal acceptance window NAW after a given time period. The fraudster may insert a fraudulent coin, get it accepted by the coin acceptor which then switches to use of the restricted access window RAW. If the fraudster then gives up after a few more tries, and goes away, the timer can then time-out in time for an honest user to come and use the acceptor on the basis of the normal acceptance window.

The routine followed by the microcontroller 11 is shown in more detail in Figure 4.

At step S0, the system is initialised. The aforementioned counter is set so that its operating parameter n is initialised i.e. $n = 0$. Also, the aforementioned timer has an operating parameter t which can vary from t_{max} to zero, which indicates a timed-out condition at step S0 t is initialised i.e. $t = 0$.

At step S1, successive values of the parameter signal $x_{1,1}, x_{1,2}, \dots, x_{1,N}$ are shown. These occurrences of the parameter signal are produced in response to the acceptor testing successive coins one after the other. The successive occurrences of the parameter signal are tested one after the other by the remainder of the routine as will now be explained.

Considering the first occurrence of the parameter signal $x_{1,1}$, produced in response to a first coin, at step S2, a test is carried out to see if the timer is active. If it is not active, $t = 0$. This means that a sufficiently long period of time has elapsed since the acceptor was last used, indicating that it is safe to use the relatively wide, normal acceptance window NAW.

At step S3, the status of the flag counter is checked. If the flag parameter $n = 0$, this means that the flag is not set and that it is safe to use the normal acceptance window NAW. However, if the flag counter is set whilst the timer is running, it is not safe to use the normal acceptance window because the conditions indicate that a previously accepted coin has triggered the flag counter whilst the timer is running. As a result, the value of $x_{1,1}$ needs to be compared with the restricted access window RAW. This is carried out at step S4. If the value of $x_{1,1}$ falls within the restricted

WO 00/48138

- 13 -

PCT/GB00/00339

access window RAW, the coin is accepted at step S5 but otherwise is rejected at step S6.

As previously mentioned, if the timer or the counter flag are set to 0, it is safe to use the normal acceptance window NAW. This test is carried out at step S7 and the coin is either accepted or rejected at step S5 or S6.

In addition to comparing the parameter value against either of the acceptance windows, each occurrence of the parameter value is compared with the upper and lower safety margins and safety barriers. These tests are performed at steps S8 and S9. If the parameter value signal $x_{1,1}$ falls within any of the barriers or margins USB, USM, LSB, LSM, this indicates that the aforementioned flag needs to be set and that the timer t should be set running. These activities are carried out at step S10, at which the count parameter n is set to a predetermined maximum value n_{max} . It will be understood that n_{max} and an integer number corresponding to the successive number of coins which subsequently need to be found to be true when using the relatively narrow restricted access window RAW. The value of the timer interval t is set to t_{max} which corresponds to the period of time for which the timer will run until reaching a value $t = 0$. This, therefore sets the time after which the acceptor will recover and switch back to use the normal acceptance window NAW after a period of using the restricted access window RAW (step S2).

If the value of the parameter signal $x_{1,1}$ does not fall within any of the margins or barriers tested by step S8, S9, this indicates that the parameter signal $x_{1,1}$, on the assumption that the coin has been accepted, falls within the restricted access window RAW. In this situation, the counter parameter n needs to be decremented, if it is not already zero. This occurs at step S11.

Considering the situation where the first occurrence of the coin parameter signal $x_{1,1}$ falls within the upper safety margin USM. In this situation, $t = 0$ and $n = 0$ so that the routine passes to step S7 at which the value is compared with the normal acceptance window NAW. The value of $x_{1,1}$ falls within the window and hence the coin is accepted at step S5.

WO 00/48138

- 14 -

PCT/GB00/00339

Additionally, the value of $x_{1,1}$ is found to be within the upper safety margin USM, at step S9. As a result, the flag counter parameter n is set to n_{max} and the timer parameter t is set to t_{max} at step S10.

5

When a second coin is entered a second occurrence of the coin parameter signal x_1 is produced, namely $x_{1,2}$. At step S2, the timer is now set to $t \neq 0$ and so the process moves to step S3. The parameter $n \neq 0$ and so the value of $x_{1,2}$ is compared with the restricted access window RAW at step S4. The value is either accepted or rejected. Assuming it is accepted, and falls outside of the margins and barriers tested at step S8 and S9, the counter parameter n is decremented at step S11. The timer t is running all the time towards zero.

The process continues with the subsequent occurrences of the parameter x_1 until the timer $t = 0$ or the counter flag $n = 0$. The acceptor then reverts to the use of the normal acceptance window NAW.

The previously described process thus relates to one of the coin parameter signals x_1 . However, as previously explained, four different coin parameter signals $x_1 - x_4$ are produced in this example and in fact, in practice, up to fourteen different individual parameter signals may be processed. The routine performed according to Figure 4 may be carried out for each individual coin parameter signal with each having its own normal access window and restricted access window, controlled as previously described, with each parameter signal being processed independently of the others. Alternatively, to simplify the processing, the occurrence of one parameter signal falling within its respective USB, LSB, LSM or USM may trigger the use of an individual restricted access window for all of the coin parameter signals concurrently.

Other modifications are possible. In the routine shown in Figure 3, the counter flag is clocked downwardly from a first predetermined number n_{max} . Typically n_{max} is in a range of 6 to 20 inclusive. Whilst $n \neq 0$ the restricted access window RAW is used (step S3). However, when $n=0$ i.e. when 6 to 20 true coins have been detected, the

WO 00/48138

- 15 -

PCT/GB00/00339

normal window NAW is used. The occurrence of a single fraudulent coin will then re-trigger the use of the RAW (steps S8 - S10). However, if desired a different pre-selected number p of occurrences of fraudulent coin could be used to re-set $n = n_{max}$ and thereby re-trigger the use of the RAW. The pre-selected number p of

5 occurrences of fraudulent coin is selected to be less than the predetermined number n to thereby improve the sensitivity of the system. Preferably the number p is 1 as described with reference to Figure 4 to maximise the sensitivity to fraudulent coins, although a larger value of p may in some instances be desirable to provide system

damping.

10 In another modification, the routine may switch from the normal acceptance window NAW to the RAW in response to a coin parameter signal falling within a very narrow portion of the NAW itself, which may signify a fraudulent coin in certain circumstances.

15 *Banknote acceptor*

The previously described routine is also applicable to banknote acceptors and an example is shown in Figure 5. A banknote 30 to be tested is inserted between driven rollers 31, 32 so as to pass over a sensing platen 33 over which a series of

20 banknote sensors are disposed. In this example, four sensors S1, S2, S3 and S4 are shown schematically. The sensors may include optical sensors for sensing the length, width or thickness of the banknote, sensors for detecting reflected light from the banknote in order to analyse the spectral response. Alternatively, the light may be sensed in transmission through the banknote. One or more individual

25 predetermined parts of the banknote may be measured. Also, the presence of magnetic printing ink may be detected as described in US Patent 4 864 238. The sensors S1-S4 are driven and processed by drive and interface circuitry 10 to produce individual parameter signals x_1, x_2, x_3, x_4 . These parameter signals are similar to the corresponding signals described with reference to Figures 1 and 2 for

30 the coin acceptor although indicative of different parameters relating to a banknote. The resulting signals thus can be processed according to the previously described routine. The parameter signals are passed to a microcontroller 11 connected to an EEPROM 12 that contains stored window values. The parameter signals are

WO 00/48138

- 16 -

PCT/GB00/00339

compared with stored windows corresponding to acceptable banknotes in the manner previously described with reference to Figure 4 and upon detection of an acceptable banknote, an output is provided on line 13 to a gate driver 14 which operates a gate 34. If the banknote is found to be acceptable, it is passed to a store
5 35 but otherwise is fed into a reject path 36 and passes out of the acceptor.

Thus, in accordance with the invention, the banknote acceptor is provided with increased security to discriminate against a fraudster inserting a series of fraudulent banknotes all made according to the same design, which individually would fall
10 within the normal acceptance window for an acceptable denomination of banknote.

Whilst the invention has been described by way of example in relation to a coin acceptor and a bank note acceptor it will be understood that it is applicable to other money items such as tokens which are sometimes used instead of coins and other
15 sheet members which have an attributable money value including, but not limited to, credit and debit cards.

WO 00/48138

- 17 -

PCT/GB00/00339

Claims

1. A money item acceptor comprising: a signal source to produce a money item parameter signal as a function of a sensed characteristic of a money item, a store to provide data corresponding to a normal acceptance range of values of the parameter signal for a money item of a particular denomination, the range including relatively high and low acceptance probability regions wherein the value of a parameter signal corresponds to a relatively high or low probability of an occurrence of sensed money item of said particular denomination, and a processor to determine when an occurrence of the parameter signal corresponding to a first money item adopts a predetermined value relationship, and in response thereto, to compare the value of a subsequent occurrence of the parameter signal corresponding to a second money item with data corresponding to a restricted acceptance range as compared with the normal acceptance range, and to provide an output corresponding to acceptability of the second money item if the second occurrence of the parameter signal falls within restricted acceptance range, characterised in that said predetermined value relationship occurs when the parameter signal corresponding to the first money item has a value within a predetermined security barrier range outside of the normal acceptance range.
2. An acceptor according to claim 1 said predetermined value relationship occurs when the parameter signal corresponding to the first money item has a value within one of (a) the low probability region and (b) the predetermined security barrier range outside of the normal acceptance range.
3. An acceptor according to claim 1 wherein said predetermined value relationship occurs when the parameter signal corresponding to the first money item has a value within one of (a) the low probability region and (b) the predetermined security barrier range outside of the normal acceptance range and (c) a predetermined portion of said high acceptance probability region.
4. An acceptor according to claim 1, 2 or 3 wherein the restricted acceptance range corresponds to the high probability region.

WO 00/48138

- 18 -

PCT/GB00/00339

5. An acceptor according to any preceding claim wherein the processor is operable to compare a predetermined number of subsequent occurrences of the parameter signal with said restricted acceptance range, and if said predetermined number all correspond to acceptable money items, thereafter to revert to the normal acceptance range.
6. An acceptor according to claim 5 wherein the processor is operable to compare the parameter signal with the normal acceptance range and to switch to the restricted range following a pre-selected number of occurrences of the parameter signal falling in said low acceptance probability region, said pre-selected number being less than said predetermined number.
7. An acceptor according to claim 6 wherein the pre-selected number is one and the predetermined number is between six and twenty inclusive.
8. An acceptor according to any preceding claim wherein the processor is operable to compare any subsequent occurrences of the parameter signal with said restricted acceptance range for a predetermined time and then to revert to the normal acceptance range.
9. An acceptor according to any preceding claim wherein the signal source is operable to produce a plurality of individual money item parameter signals each as a function of a respective different characteristic of a sensed money item, and the store is configured to provide data for normal acceptance ranges of values of the parameter signals individually for a money item of a particular denomination.
10. An acceptor according to claim 9 wherein the processor is operable to compare the first occurrence of each parameter signal individually with a corresponding one of said normal acceptance ranges, and to compare a subsequent occurrence of each of the different parameter signals with a corresponding restricted acceptance range for each parameter signal, in response to any one of the first occurrences of the parameter signals having a predetermined value relationship

WO 00/48138

- 19 -

PCT/GB00/00339

with the low acceptance probability region of its corresponding normal acceptance range.

11. An acceptor according to claim 9 wherein the processor is operative to
5 compare the first occurrence of each parameter signal individually with a
corresponding one of said normal acceptance ranges, and to compare a subsequent
occurrence of each of the different parameter signals with a corresponding
restricted acceptance range for each parameter signal, selectively in response to a
corresponding one of the first occurrences of the parameter signals having a
10 predetermined value relationship with the low acceptance probability region of its
normal acceptance range.
12. An acceptor according to any preceding claim wherein the signal source
includes a sensor to sense a characteristic of the money item.
13. An acceptor according to claim 12 wherein the sensor is operable to sense a
15 characteristic of a money item that comprises a coin.
14. An acceptor according to claim 13 wherein the sensor comprises an inductor
20 to sense an inductive characteristic of the coin.
15. An acceptor according to claim 13 wherein the sensor is operable to sense a
characteristic of a money item that comprises a banknote.
16. A method of accepting a money item comprising: producing a money item
25 parameter signal as a function of a sensed characteristic of a money item, providing data
corresponding to a normal acceptance range of values of the parameter signal for a
money item of a particular denomination, the range including relatively high and
low acceptance probability regions wherein the value of a parameter signal
30 corresponds to a relatively high or low probability of an occurrence of sensed
money item of said particular denomination, determining when an occurrence of the
parameter signal corresponding to a first money item has a value within a
predetermined security barrier range outside of the normal acceptance range, and in

WO 00/48138

- 20 -

PCT/GB00/00339

response thereto, comparing the value of a subsequent occurrence of the parameter signal corresponding to a second money item with data corresponding to a restricted acceptance range as compared with the normal acceptance range, and providing an output corresponding to acceptability of the second money item if the second occurrence of the parameter signal falls in the restricted acceptance range.

17. A money item acceptor comprising: a signal source to produce a money item parameter signal as a function of a sensed characteristic of a money item, a store to provide data corresponding to a normal acceptance range of values of the parameter signal for a money item of a particular denomination, the range including relatively high and low acceptance probability regions wherein the value of a parameter signal corresponds to a relatively high or low probability of an occurrence of sensed money item of said particular denomination, and a processor to determine when an occurrence of the parameter signal corresponding to a first money item adopts a predetermined value relationship with the low acceptance probability region, and in response thereto, to compare the value of a subsequent occurrence of the parameter signal corresponding to a second money item with data corresponding to a restricted acceptance range as compared with the normal acceptance range, and to provide an output corresponding to acceptability of the second money item if the second occurrence of the parameter signal falls in the restricted acceptance range, said processor being operable to compare a first predetermined number of subsequent occurrences of the parameter signal with the restricted acceptance range, and if all of them correspond to acceptable money items, to revert to the normal acceptance range, characterised in that when using the normal range, the restricted acceptance range is selected in response to a second pre-selected number of occurrences of the parameter signal, smaller than said first predetermined number, adopting said predetermined value relationship.

18. An acceptor according to claim 17 wherein said second pre-selected number of occurrences comprises a single occurrence.

WO 00/48138

- 21 -

PCT/GB00/00339

19. An acceptor according to claim 18 or 19 wherein the first predetermined number of occurrences is between six and twenty inclusive.

20. An acceptor according to any one of claims 17 to 19 wherein the processor is operable to compare occurrences of the parameter signal subsequent to the adoption of the restricted acceptance range, with said restricted acceptance range for a predetermined time and then to revert to the normal acceptance range.

21. An acceptor according to any one of claims 17 to 20 wherein said predetermined value relationship occurs when the parameter signal corresponding to the first money item has a value within the low acceptance probability region

22. An acceptor according to any one of claims 17 to 21 wherein said predetermined value relationship occurs when the parameter signal corresponding to the first money item has a value within a predetermined security barrier range outside of the normal acceptance range.

23. An acceptor according to any one of claims 17 to 22 wherein said predetermined value relationship occurs when the parameter signal corresponding to the first money item has a value within a predetermined portion of said high acceptance probability region.

24. A method of accepting a money item comprising: producing a money item parameter signal as a function of a sensed characteristic of a money item, providing data corresponding to a normal acceptance range of values of the parameter signal for a money item of a particular denomination, the range including relatively high and low acceptance probability regions wherein the value of a parameter signal corresponds to a relatively high or low probability of an occurrence of sensed money item of said particular denomination, determining when an occurrence of the parameter signal corresponding to a first money item adopts a predetermined value relationship with the low acceptance probability region, and in response thereto, comparing the value of a subsequent occurrence of the parameter signal corresponding to a second money item with data corresponding to a restricted

WO 00/48138

- 22 -



PCT/GB00/00339

acceptance range as compared with the normal acceptance range, and providing an output corresponding to acceptability of the second money item if the second occurrence of the parameter signal falls in the restricted acceptance range, comparing a first predetermined number of subsequent occurrences of the parameter signal with the restricted acceptance range, and if they correspond to acceptable money items, reverting to the normal acceptance range, characterised in that when using the normal acceptance range, the restricted acceptance range is selected when a second pre-selected number of occurrences of the parameter signal, smaller than said first predetermined number, adopt said predetermined value relationship.

WO 00/48138

PCT/GB00/00339

1 / 3

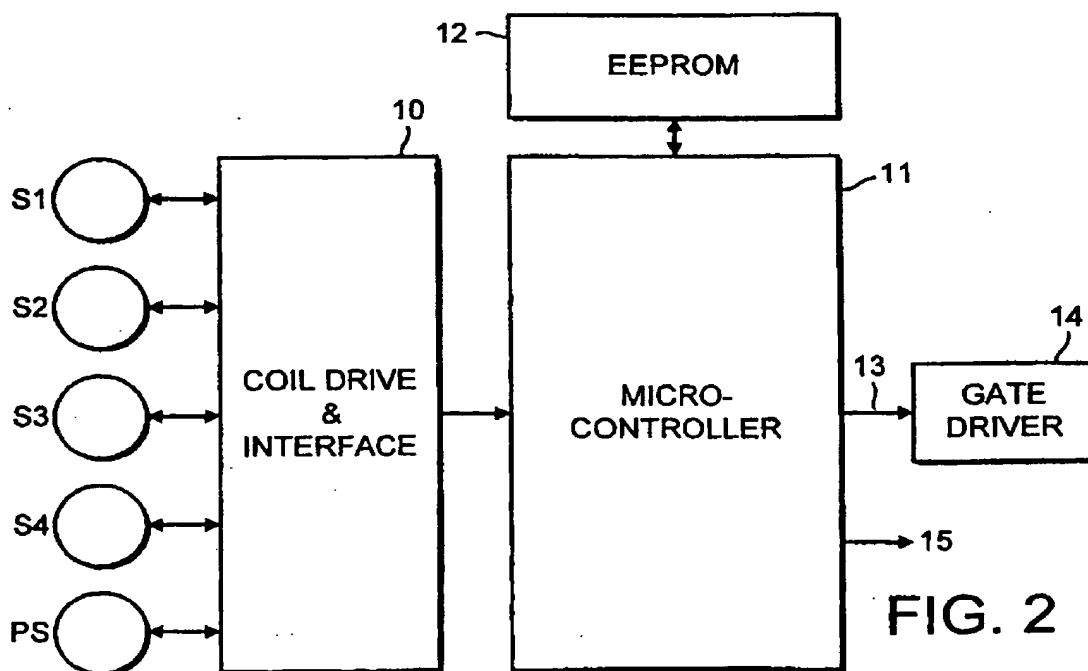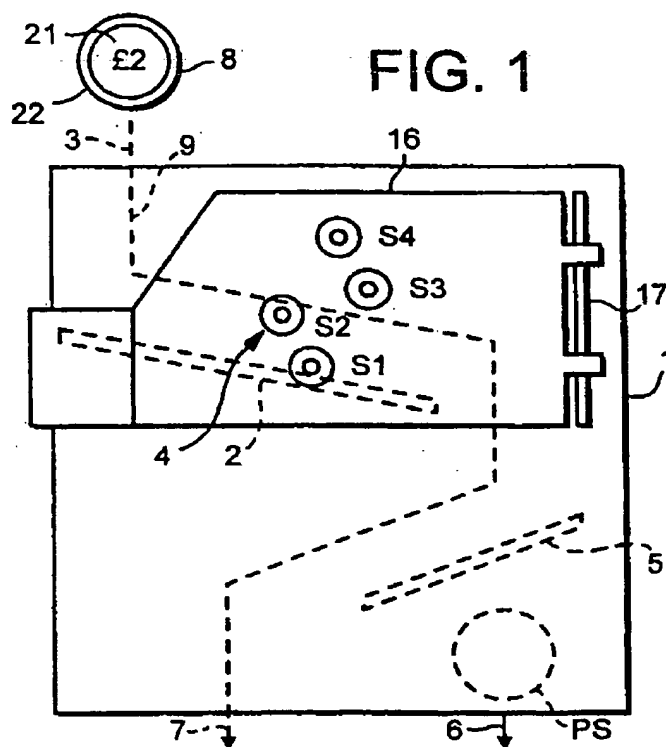

WO 00/48138

PCT/GB00/00339

2 / 3

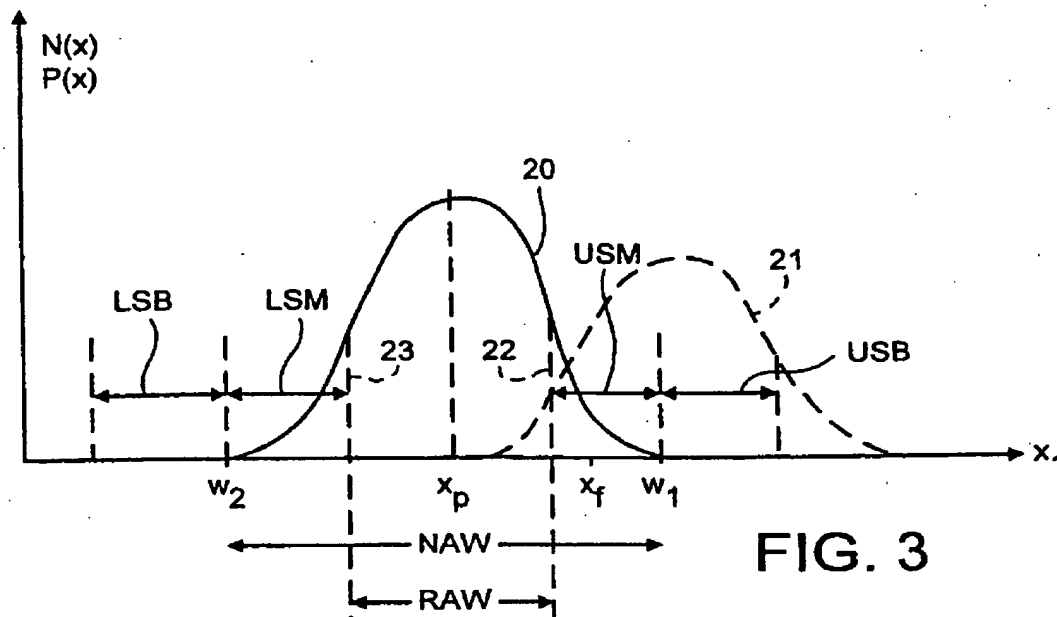


FIG. 3

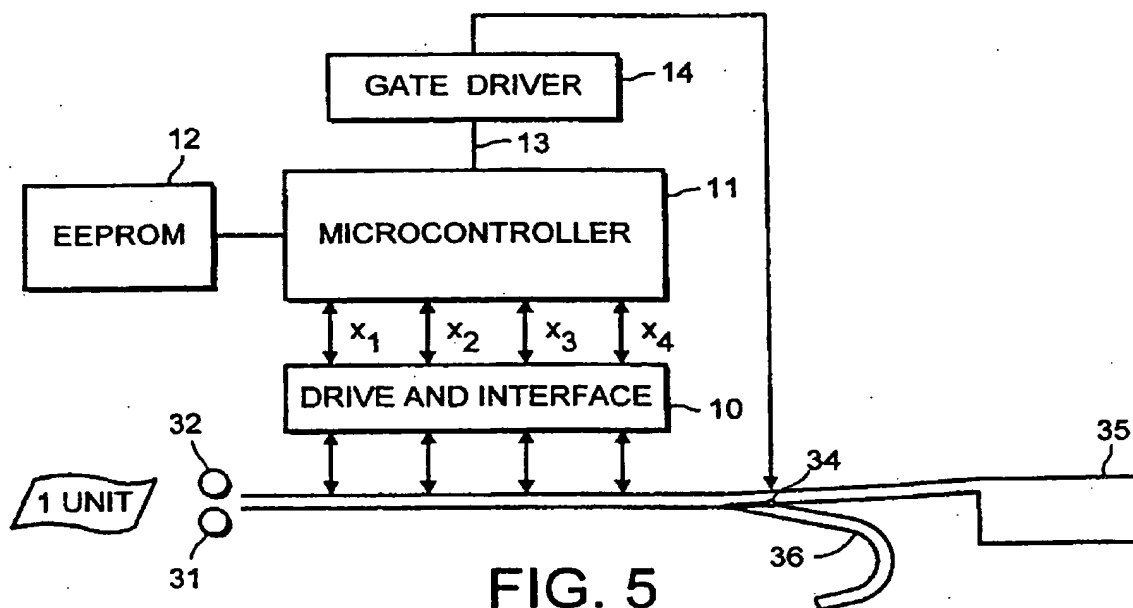


FIG. 5

WO 00/48138

PCT/GB00/00339

3 / 3

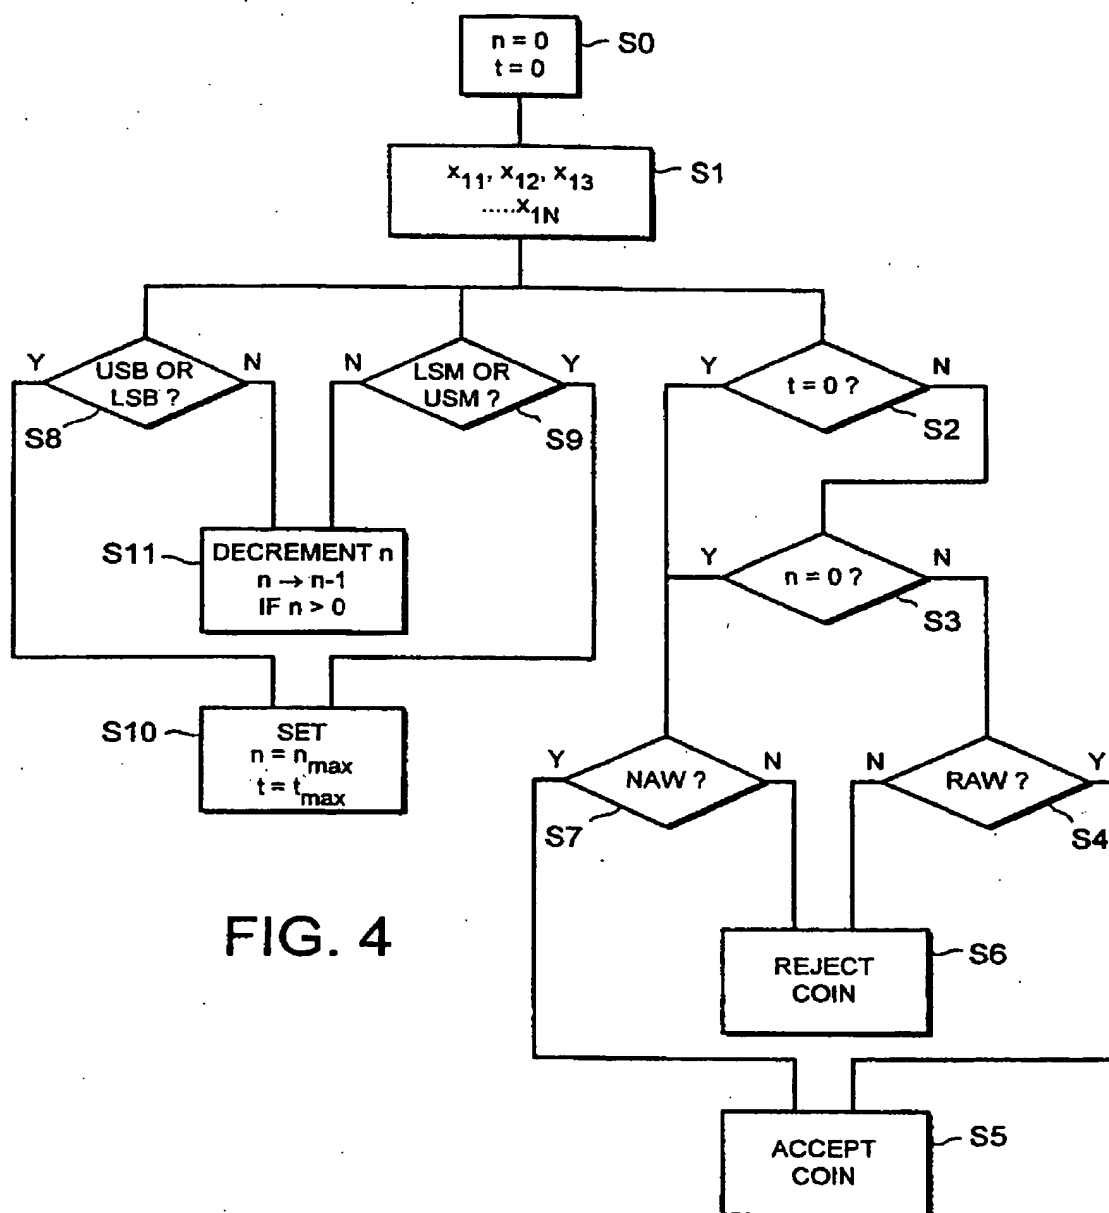


FIG. 4

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/GB 00/00339

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G07D5/08 G07D7/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 G07D G07F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 96 36022 A (ALLAN RICHARD DOUGLAS ; CAMPBELL BERNARD JOSEPH (GB); HUTCHINSON DE) 14 November 1996 (1996-11-14) page 21, line 10 -page 23, line 33 page 27, line 5 -page 29, line 19 page 33, line 10 -page 36, line 11 figures 14,15,18,19	1-24
A	US 5 355 989 A (BEST JOCHEN) 18 October 1994 (1994-10-18) cited in the application column 2, line 52 -column 3, line 33 claims 1-3; figure 1	1-5, 9-14, 16-18,24
A	EP 0 384 375 A (URMET SPA) 29 August 1990 (1990-08-29) column 3, line 12 -column 4, line 5 claims; figure 2	1,9-14, 16,17,24
	-/-	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "S" document member of the same patent family

Date of the actual completion of the international search

14 April 2000

Date of mailing of the international search report

26/04/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 851 epo nl,
Fax: (+31-70) 340-3018

Authorized officer

Bocage, S

Form PCT/ISA/210 (second sheet) (July 1992)

page 1 of 2

INTERNATIONAL SEARCH REPORT

Information Application No
PCT/GB 00/00339

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 546 869 A (DEAN ROBERT ET AL) 15 October 1985 (1985-10-15)	
A	US 5 718 318 A (WACHTER ARNOLD WALTER) 17 February 1998 (1998-02-17)	

1

Form PCT/ISA210 (continuation of second sheet) (July 1992)

page 2 of 2

INTERNATIONAL SEARCH REPORT

Information on patent family members

International publication No
PCT/GB 00/00339

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9636022 A	14-11-1996	GB 2300746 A	13-11-1996
		AU 5655896 A	29-11-1996
		EP 0824738 A	25-02-1998
		EP 0924658 A	23-06-1999
		US 5931277 A	03-08-1999
US 5355989 A	18-10-1994	DE 4121034 C	10-09-1992
		DE 59207161 D	24-10-1996
		EP 0520230 A	30-12-1992
		ES 2093141 T	16-12-1996
EP 0384375 A	29-08-1990	IT 1232019 B	23-01-1992
		DE 69003969 D	25-11-1993
US 4546869 A	15-10-1985	GB 2118344 A	26-10-1983
		AT 32276 T	15-02-1988
		AU 563028 B	25-06-1987
		AU 1133083 A	18-08-1983
		CA 1198211 A	17-12-1985
		CA 1198212 A	17-12-1985
		DK 61183 A, B,	13-08-1983
		EP 0086648 A	24-08-1983
		ES 519745 D	01-03-1984
		ES 8403224 A	01-06-1984
		GB 2116767 A, B	28-09-1983
		HK 20293 A	19-03-1993
		JP 58163090 A	27-09-1983
		SG 3791 G	05-04-1991
US 5718318 A	17-02-1998	GB 2279796 A	11-01-1995
		DE 69405105 D	25-09-1997
		DE 69405105 T	05-03-1998
		EP 0706698 A	17-04-1996
		ES 2105721 T	16-10-1997
		HK 1001929 A	17-07-1998
		WO 9500932 A	05-01-1995
		JP 9501248 T	04-02-1997

Form PCT/ISA/210 (patent family annex) (July 1992)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 25 4260

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	WO 00 48138 A (COIN CONTROLS ; BELL MALCOLM REGINALD HALLAS (GB)) 17 August 2000 (2000-08-17) * The whole document	1-7	G07D5/08 G07D7/00
A	US 6 119 844 A (ALI RIAZ) 19 September 2000 (2000-09-19) * column 2, line 60 - column 7, line 51 *	1-7	
A	US 6 223 877 B1 (DISTLER GREGORY LEE ET AL) 1 May 2001 (2001-05-01) * column 4, line 1 - column 4, line 22 * * column 8, line 21 - column 8, line 24 * * column 8, line 57 - column 9, line 45 *	1-7	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			G07D
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 24 September 2003	Examiner Anastasov, Y
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

2

EPO FORM 1508 03/82 (P04001)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.